
INSTALLATION INSTRUCTIONS

This system is a 12 volt system designed to work with 12 volt accessories. Any 6 volt accessories need to be converted to 12 volt before installation of the wiring. This wiring kit is designed for ease of installation. Please read the guidelines below, BEFORE STARTING your installation, to guarantee a successful job! Use an appropriate crimping tool which folds the crimp "wings" on the terminals as shown below. ALL TERMINALS THAT YOU INSTALL SHOULD BE PROPERLY SOLDERED. Our factory terminations are install by GM approved five ton presses, and soldering is not necessary on these terminations.





end view of terminal

proper crimp of terminal

wire core

STEP 1: DISCONNECT YOUR BATTERY:

Disconnect the battery before installing the wiring kit to prevent any accidental shorting caused by loose bare wire ends.

STEP 2: START INSTALLING KIT:

This kit is broken down into individual steps that are identified by a letter printed on the instruction sheets visible through each bag. These letters are the order of operation for installing your kit. Start with the bag letter "G", then "H", etc. The order of installation is shown below.

G	500559	Dash Harness Kit
Н	500608	Instrument Cluster Kit
J	500551	Engine Kit
L	500558	Front Light Kit
M	500561	Rear Body Kit
Ν	500614	Courtesy Lamp Kit
0	500613	Wiper Kit
Ρ	500611	Heater Kit

STEP 3: RECONNECT YOUR BATTERY:

When you have completed the installation and are ready to reconnect the battery, make sure that the following electrical system grounds are in place:

- A. Battery is grounded to the ENGINE BLOCK.
- B. Battery is grounded to the frame.
- C. Engine block is grounded to the frame.
- D. Body is grounded to the frame.
- E. RE-CHECK GROUNDS

STEP 4: CHECK ALL ELECTRICAL FUNCTIONS:

Any non-functioning items should be checked for proper installation. Any problems with your wiring and electrical circuit functions should be addressed to American Autowire Systems, Inc. as soon as possible to avoid any warranty problems.


If you have any questions concerning this or any of our products, please feel free to call us at 1-800-482-WIRE.

"AMERICAN AUTOWIRE MAKES IT EASY!!"

THIS KIT DOES NOT SUPPORT STOCK (ORIGINAL)
GENERATORS. THE DESIGN OF THE KIT IS DESIGNED
TO SUPPLY MORE POWER THAN THE GENERATOR IS
ABLE TO SUPPLY.

START YOUR INSTALLATION HERE

Read this sheet first before starting your installation process

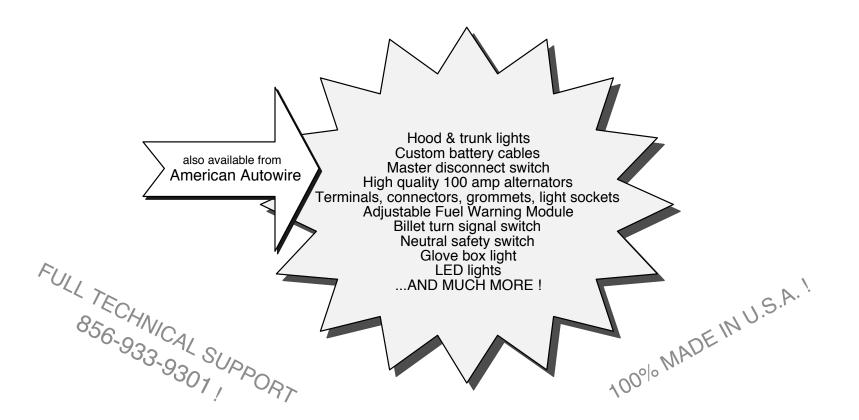

OPTIONAL ACCESSORY KITS

Universal Relay Kit
Battery Junction Block
Circuit Breaker
Custom Battery Cable Kit
Fan Relay Kit
Grommet Kits
High Quality Temp Senders
Master Disconnect Switch
Neutral Safety switch (GM)
Turn Signal Switch

p/n 500142	Relay control of a heavy duty circuit.
p/n 500155	Use for joining battery power leads, or ground leads.
p/n 500405	30 Amp auto reset.
p/n 500424	2 gauge cable for use on side mount battery.
p/n 500479	Kit with relay and wiring.
•	OEM style firewall grommet sets available.
	Hotronic Temperature sending units available
p/n 500003	Heavy duty battery disconnect.
p/n 500104	GM TH400, TH350, 700R4.
•	OEM style turn signal switches available!




www.americanautowire.com 856-933-0801


500560

DESCRIPTION:

FULL VEHICLE WIRING KIT 1960-66 CHEVY/GMC TRUCK

92965659 Instruction Sheet Rev 3.0 1/30/2013

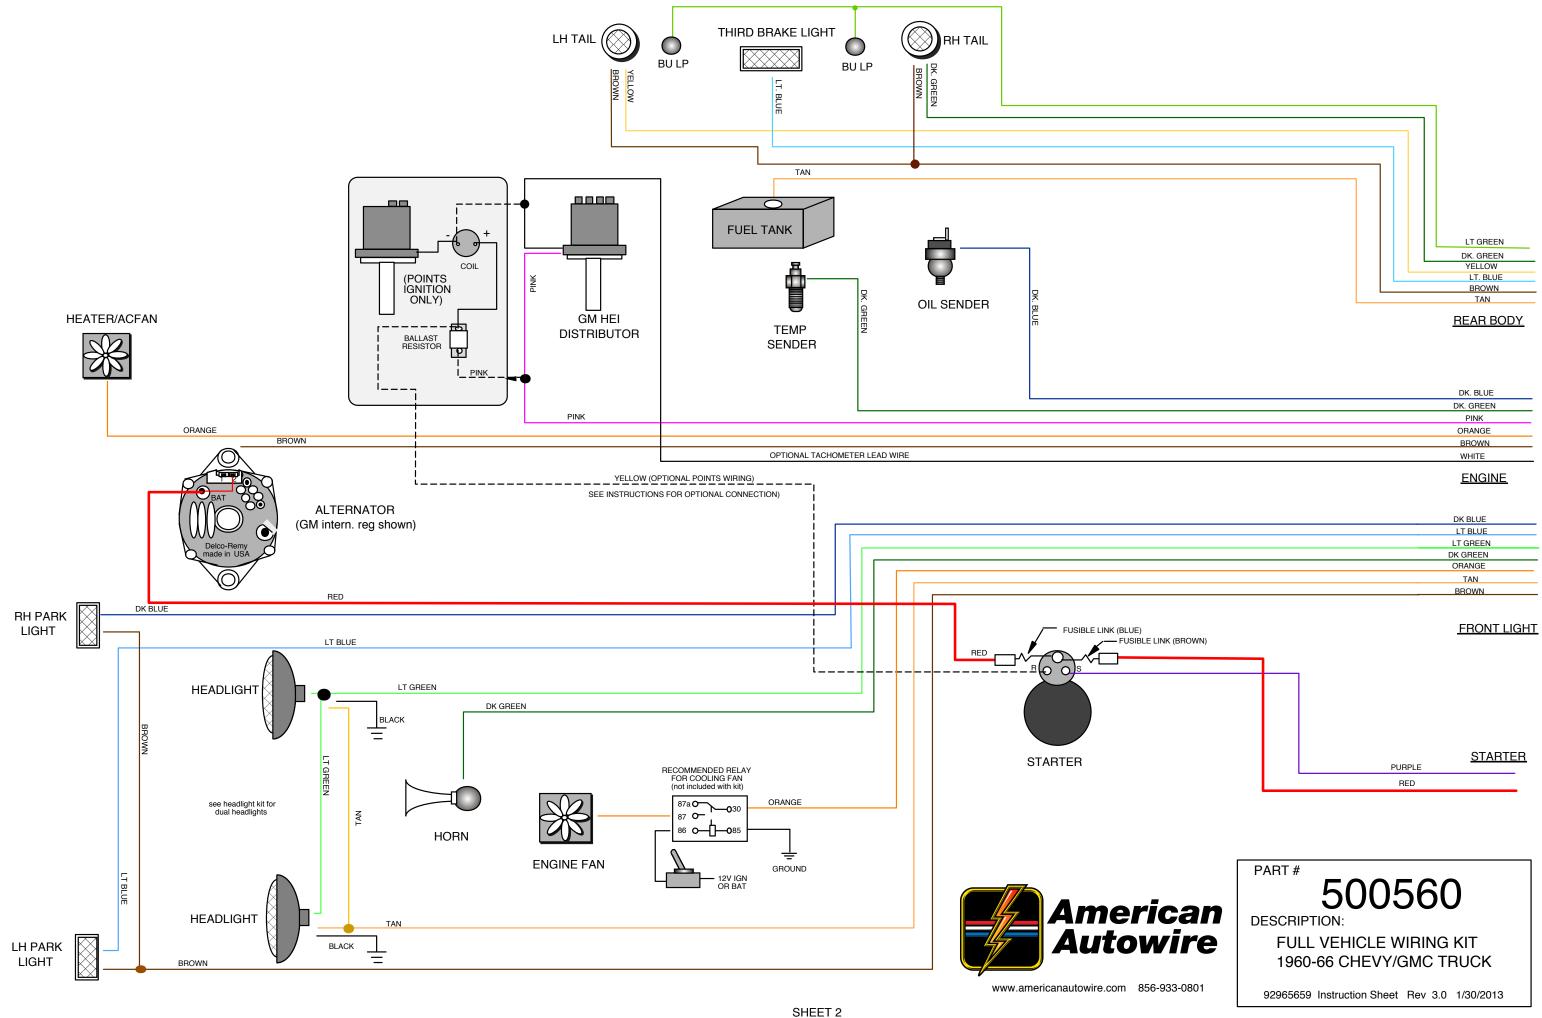

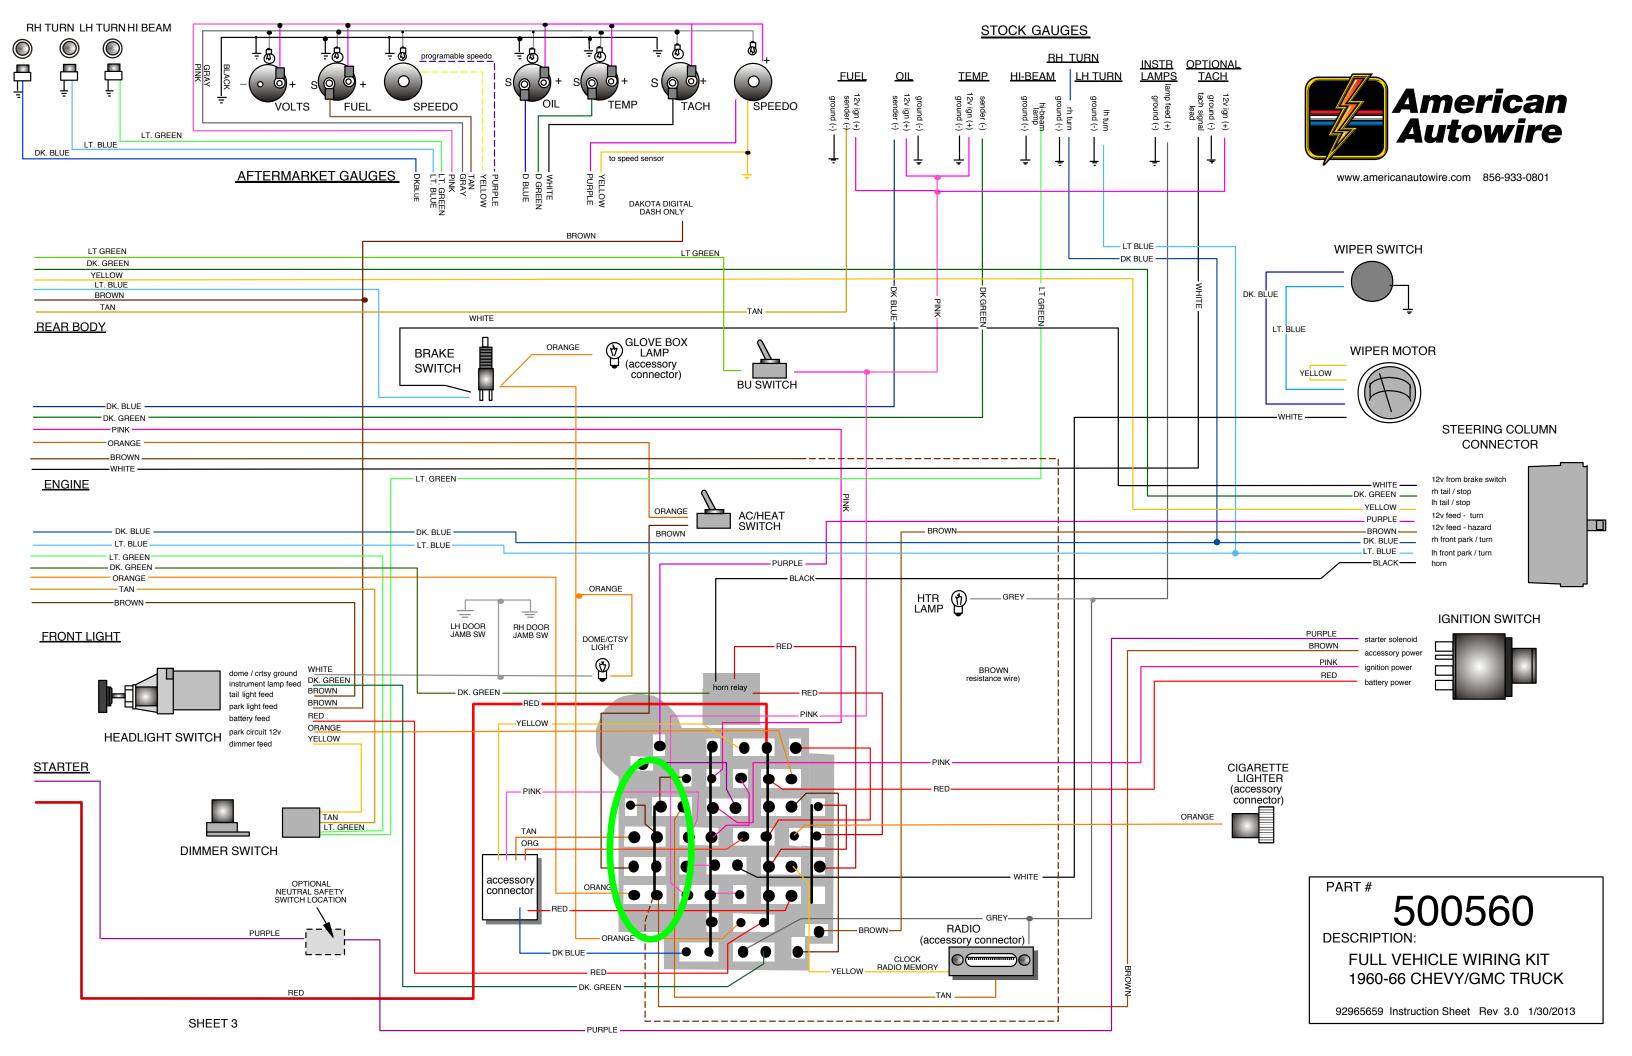

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK



500560

DESCRIPTION:

FULL VEHICLE WIRING KIT 1960-66 CHEVY/GMC TRUCK

92965659 Instruction Sheet Rev 3.0 1/30/2013