
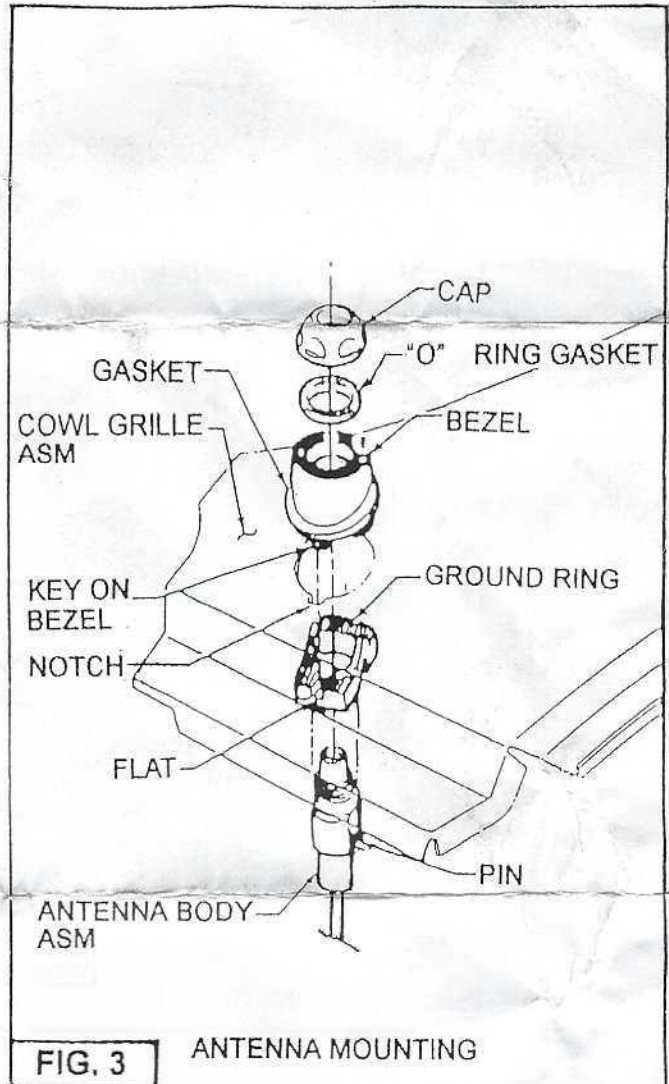
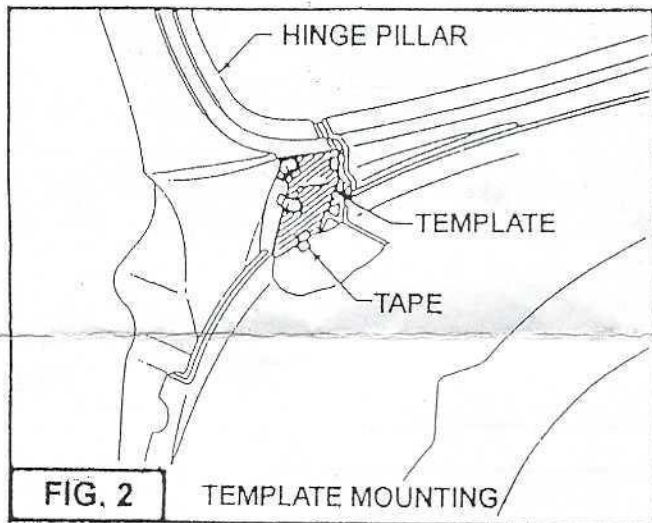


# RADIO ANTENNA INSTRUCTION SHEET TRUCK (EXCEPT TILT CAB)

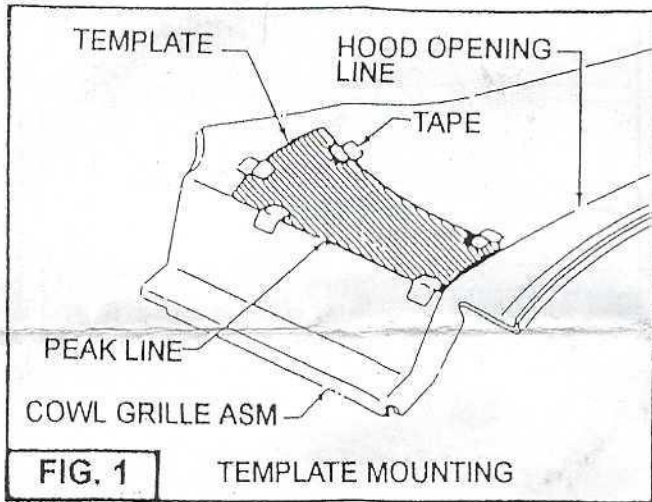

**STEP 1** REMOVE & RETAIN WINDSHIELD WIPER ROD ASSEMBLIES.

**STEP 2** REMOVE & RETAIN COWL GRILLE ASM & ATTACHING PARTS.

**STEP 3** ALIGN & TAPE TEMPLATE ON R.H. SIDE OF COWL GRILLE ASM, CENTERPUNCH, REMOVE TEMPLATE, DRILL HOLE & FILE NOTCH AS INSTRUCTED ON TEMPLATE. SEE FIG. 1.

**STEP 4** ALIGN & TAPE TEMPLATE TO HINGE PILLAR, CENTERPUNCH, REMOVE TEMPLATE & DRILL HOLE AS INSTRUCTED ON TEMPLATE. SEE FIG. 2.

**STEP 5** ASSEMBLE GROUND RING ON PINS OF ANTENNA BODY & PLACE ANTENNA BODY THRU HOLE IN COWL GRILLE ASM. SEE FIG. 3.

**STEP 6** SUB-ASSEMBLE GASKET TO BEZEL. PLACE OVER ANTENNA BODY & SLIP KEY ON BEZEL THRU NOTCH IN COWL GRILLE ASM & INTO FLAT OF GROUND RING. INSERT "O" RING TYPE GASKET INTO BEZEL. PLACE CAP OVER ANTENNA BODY & TIGHTEN WITH AN OPEN END WRENCH. SEE FIG. 3.